

F15-20 / F2-20 EFFLUENT PUMPS




Submersible pumps with cast iron body, for waste water containing solids. Robust construction with float switch for automatic operation.

Suitable for emptying sumps and septic tanks, emergency drainage and agricultural dirty water.

Specification

Pump body and base in cast iron.
 Motor casing, supports and impeller in 304 stainless steel.
 Motor shaft in 316 stainless steel.
 Solids handling capability:
 F1214, open impeller, 30 mm passage
 F1520, vortex impeller, 50 mm passage

Oil-bath motor with mechanical seal and lip-seal for sand protection.
 Motor Protection IP68
 Insulation class F

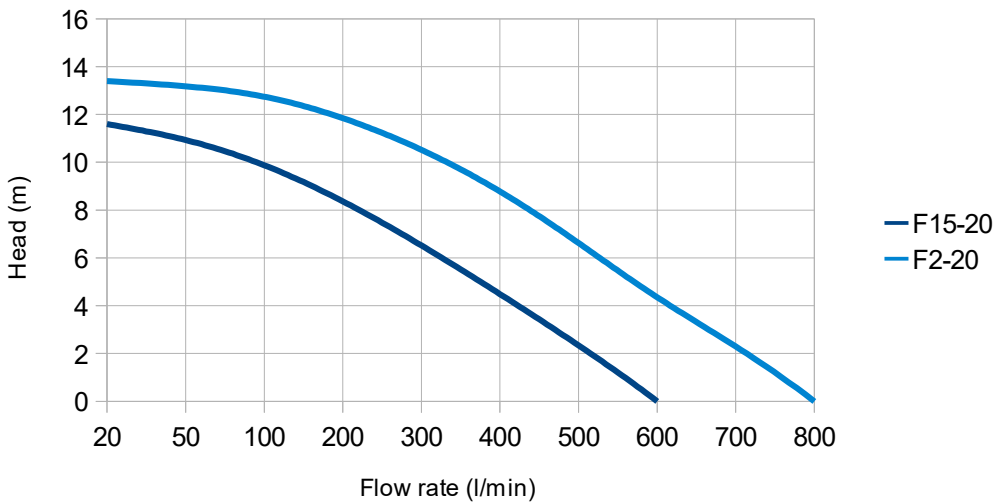

	kW	Amps		kg	Outlet		Flow (l/min)									
		1~	3~				20	50	100	200	300	400	500	600	700	800
F15-20	1.1	7.5	3	20	2"	Head (m)	11.6	11	10.5	8.7	6.6	4.5	2.5	0	-	-
F2-20	1.5	10.5	3.4	22	2"	Head (m)	13.4	13.2	13	12	10.8	9.2	6.8	4	2.5	0