

# SSX 750 DRAINAGE PUMP




**A high head submersible stainless steel pump for drainage and waste water with float switch for automatic operation.**

Suitable for water transfer, emptying sumps, emergency drainage and water display fountains. It can be used for seawater.

### Specifications

304 grade stainless steel construction  
 Impeller: nylon/fibreglass  
 Maximum suspended solids: 10mm

Oil-bath motor with double mechanical seal.  
 Motor Protection IP68  
 Insulation class F

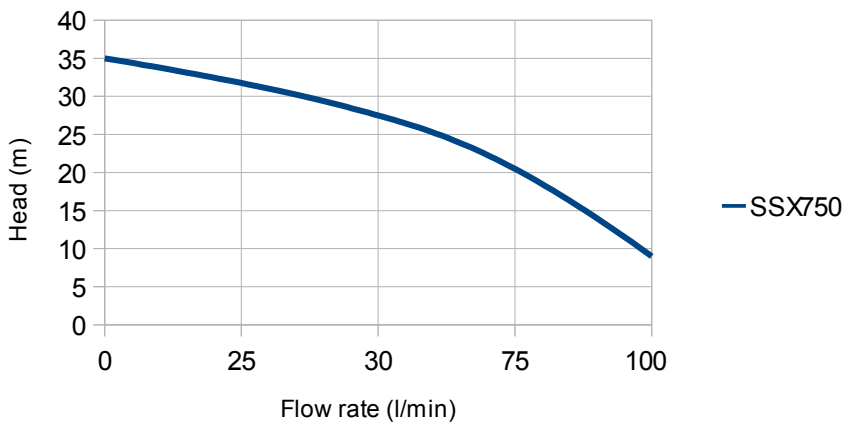

	kW	A	kg	Flow (l/min)	0	25	30	75	100
<b>SSX750</b>	0.8	4	10	Head (m)	35	32	28	22	9